

# SILENT RELAY

## 1 POLE - 25A (for automotive applications)

### FTR-P5 Series

#### ■ FEATURES

- Low operating sound  
An original silent mechanism decreases the propagation of operating sound when mounted on a PCB  
(Average sound pressure: 50dB at 5 cm, 45dB at 10cm)
- Compact, high density package 198 mm<sup>2</sup> mounting area
- High sensitivity, low power consumption  
(nominal power consumption: 450 mW)
- High capacity  
Heat dissipation is high due to a single cover structure
- Typical applications:  
Wiper, power window, doorlock, power seat  
sunroof, interior lighting, fan
- RoHS compliant  
Please see page 7 for more information



#### ■ PARTNUMBER INFORMATION

[Example]     FTR-P5    C    N    012    W1    \*\*  
                   (a)    (b)    (c)    (d)    (e)    (f)

(a)	Relay type	FTR-P5 :FTR-P5-Series
(b)	Contact configuration	C : 1 form C
(c)	Sealing	N : Plastic sealed
(d)	Coil rated voltage	012 : 9.....12 VDC Coil rating table at page 3
(e)	Contact material	W1 : Silver-tin oxide-indium oxide
(f)	Special type	To be assigned custom specification

Actual marking does not carry the type name: "FTR"  
 E.g.: Ordering code: FTR-P5CN012W1 Actual marking: P5CN012W1

# FTR-P5 SERIES

## ■ SPECIFICATION

Item	FTR-P5		
Contact Data	Configuration	1 form C	
	Material	Silver-tin oxide-indium oxide	
	Contact path voltage drop	Max. 100mV at 1A, 12VDC	
	Contact rating	14VDC, 25A (motor locked)	
	Max. carrying current	25A/1 hour (25 °C, nominal voltage applied to coil)	
	Max. inrush current	35A (reference)	
	Max. switching voltage	16VDC (reference)	
	Max. switching current	35A (reference)	
	Min. switching load *	6VDC, 1A (reference)	
Life	Mechanical	Min. 10 million operations	
	Electrical	Min. 100k operations (at contact rating)	
Coil Data	Operating temperature range	-40 °C to +85 °C (no frost)	
	Storage temperature range	-40 °C to +100 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 10 ms	
	Release (at nominal voltage)	Max. 5 ms (without diode)	
Other	Vibration resistance	Operational	10 to 55Hz double amplitude 1.5mm , 3 shock in 6 directions
	Shock	Operational	Min. 100m/s <sup>2</sup> (10g) (11 ± 1ms)
		No damage	Min. 1000m/s <sup>2</sup> (100g) (6 ± 1ms)
	Weight	Approximately 13 g	
	Average sound pressure	Approximately 50dB at 5cm	

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Power Consumption at Nominal Coil Voltage (mW)
009	9	180	5.5 (at 20 °C)	0.7 (at 20 °C)	450
			6.9 (at 85 °C)	0.9 (at 85 °C)	
010	10	220	6.3 (at 20 °C)	0.8 (at 20 °C)	455
			7.9 (at 85 °C)	1.0 (at 85 °C)	
012	12	320	7.3 (at 20 °C)	1.0 (at 20 °C)	450
			9.2 (at 85 °C)	1.3(at 85 °C)	

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise stated.


\* Specified operate values are valid for pulse wave voltage.

## CHARACTERISTIC DATA

### Life test (examples)


- Test item  
14 VDC, 17A  
Inrush current: 30A  
Motor free  
300K operations minimum  
0.25 seconds ON  
9.75 seconds OFF

• Test circuit




Note: NC contacts provide dynamic brake circuit


• Change in pick-up drop-out voltage

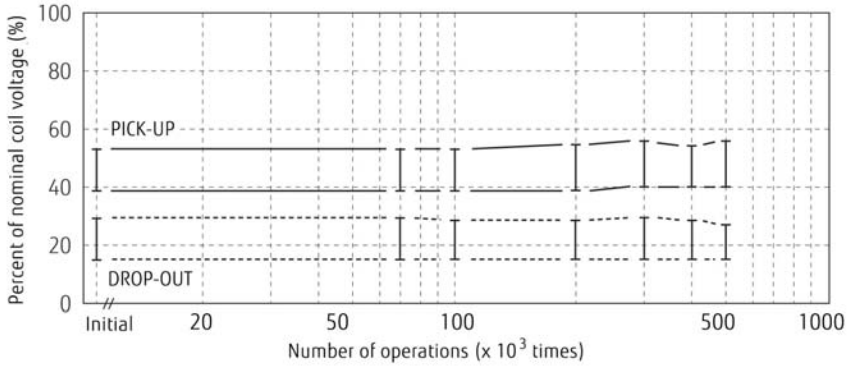

• Current wave form




• Change in contact resistance

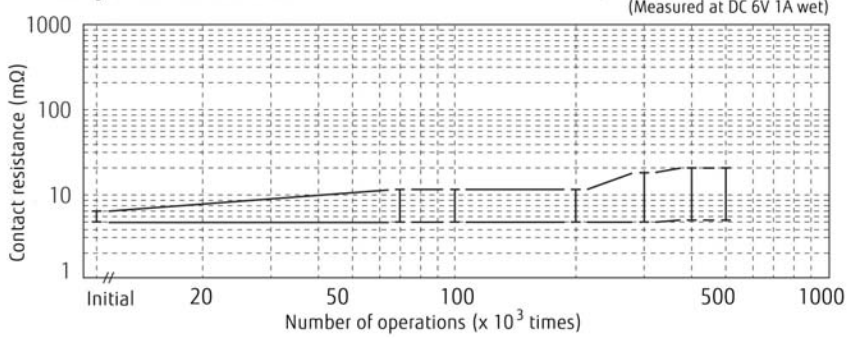


- Test item  
14 VDC, 25A  
Motor lock  
100K operations minimum  
(1 operation = 1 forward and 1 reverse)


• Test circuit




• Shift of pick-up drop-out voltage

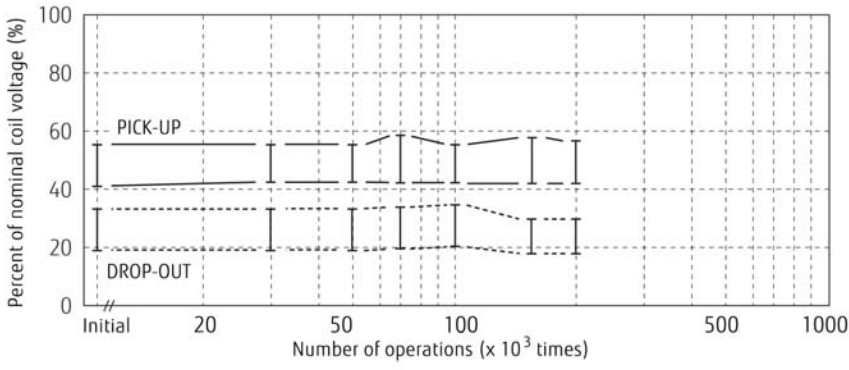

• Current wave form




• Change in contact resistance

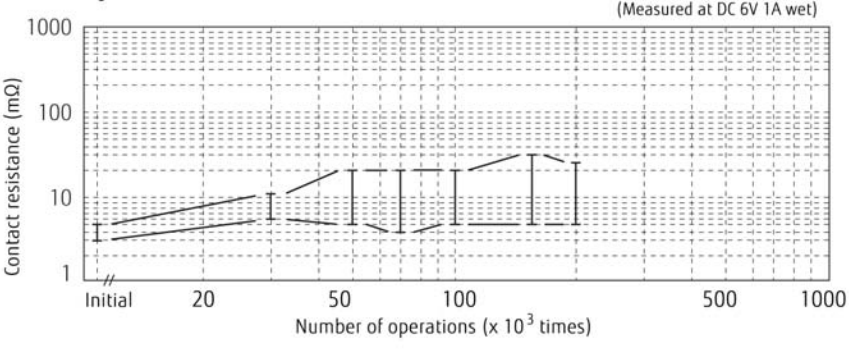


# FTR-P5 SERIES


## Coil temperature rise

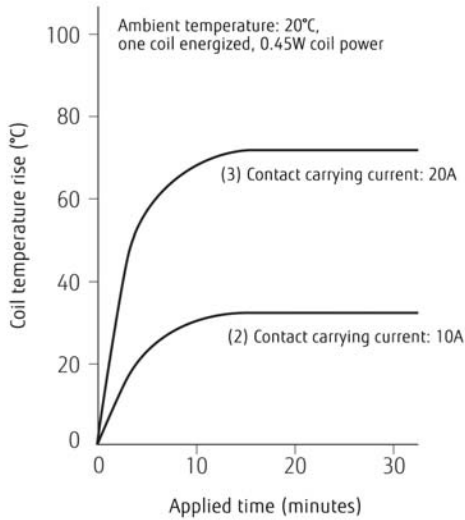


## Operating coil voltage range

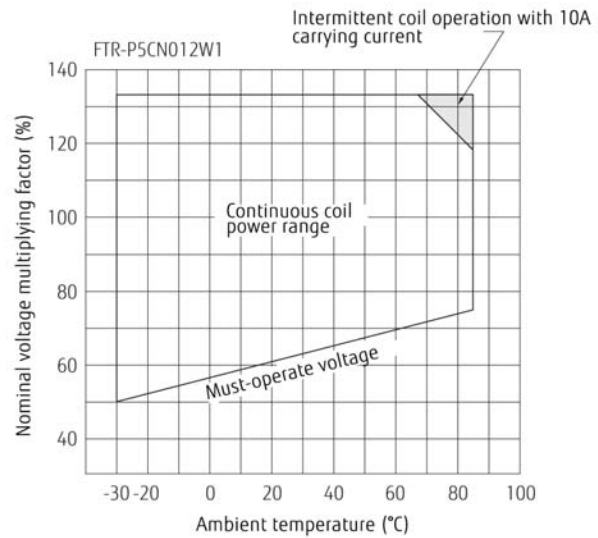


## Vibration resistance characteristics

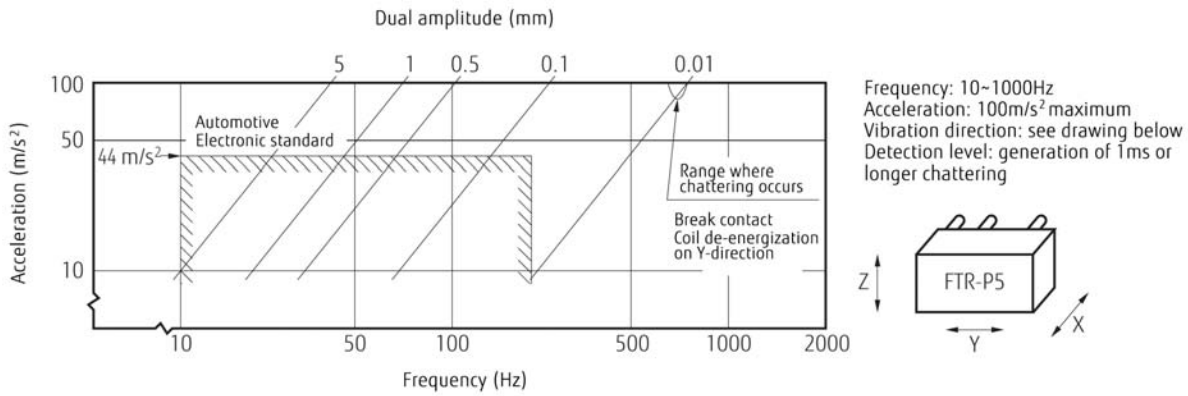

## Shock resistance characteristics

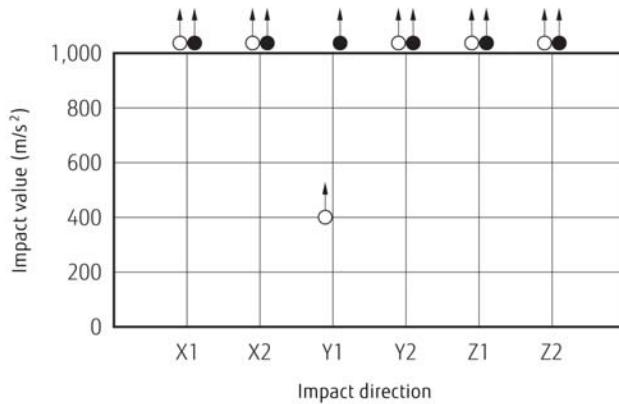


Impact apply time: 11 ±1ms, half-sine wave  
 Test condition: coil, energized and de-energized  
 Impact direction: see drawing below  
 Detection level: generation of 1ms or longer contact chattering




- : Break contact (coil de-energized)
- : Make contact (coil energized)

# FTR-P5 SERIES


Maximum break capacity

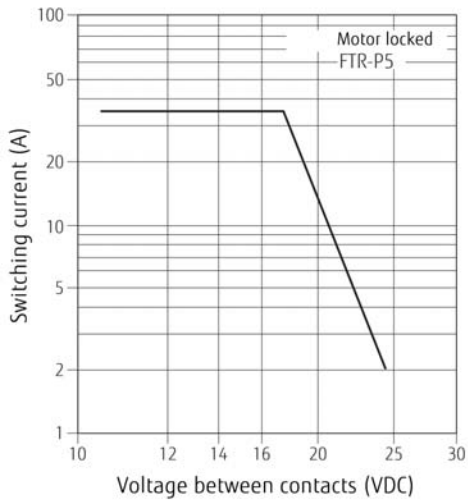


Life

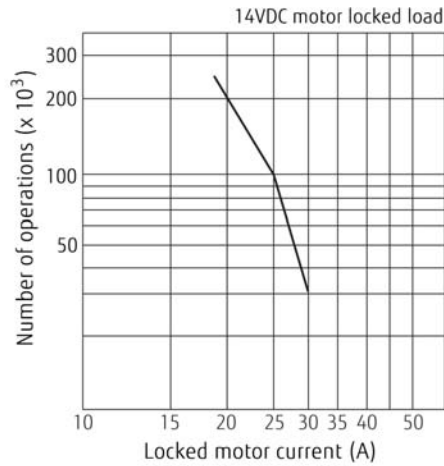


Distribution of sound pressure (with diode)

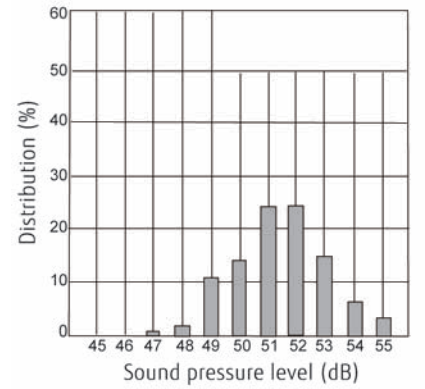

Method of acoustic noise measure  
 Measuring condition: Distance from 5 cm, relay operation at 10Hz  
 Tester: Noise tester Ryon NA-61, A range

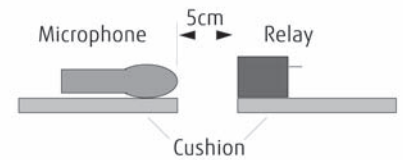


Test circuit




## REFERENCE DATA


Distribution of operate/release voltage

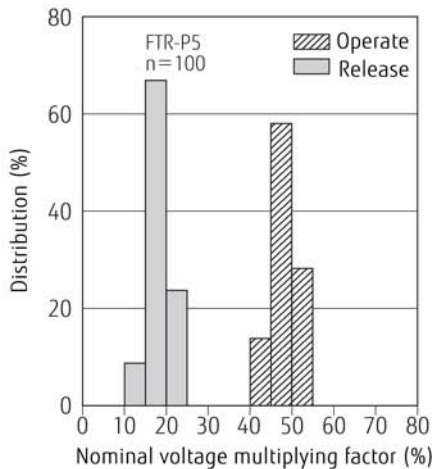

Distribution of operate/release time

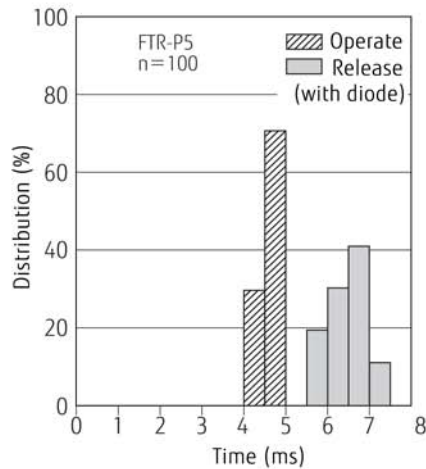


Distribution of contact resistance

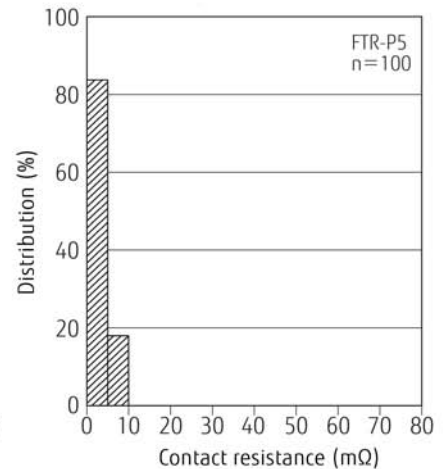


# FTR-P5 SERIES

## ■ DIMENSIONS


- Dimensions

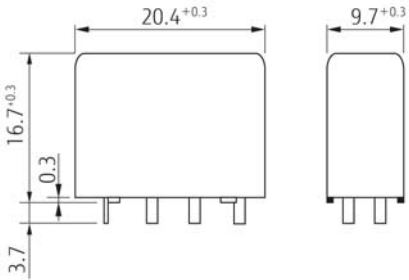

- Schematics (BOTTOM VIEW)



- PC board mounting hole layout (BOTTOM VIEW)

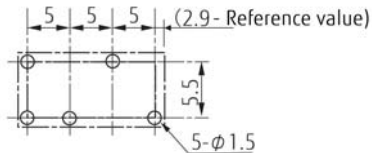

- Tube carrier



Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All automotive relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our automotive relays are lead-free.
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

**Japan**

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

**North and South America**

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

**Europe**

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

**Asia Pacific**

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. March 16, 2011